



decibeX 200VCL

PRODUCT DATA SHEET

www.decibex.com


decibeX 200VCL is a sound reducing underlay for parquet or laminated flooring. The product is thin and has very good impact sound reduction characteristics.

- ✓ Low building height 2 mm
- ✓ Very good sound reduction properties

TECHNICAL DATA:

Weight:	200 g/m ²
Thickness:	2,0 mm
Width:	0,99 m
Length:	15,2 m
Area:	15 m ²
Rolls per pallet:	24 st = 360 m ²
Weight per roll:	3,3 kg
Density:	0,1 g/cm ³
Heat transfer resistance:	0,041 m ² K/W
Heat transfer rate:	0,049 W/mK
Walking sound improvement:	32 % (IHD-StdW431/DIN 45631)
Footfall sound reduction:	Δ L _w 22 dB (DIN/EN/ISO 140/717)
Fire classification:	Efl (EN 13501-1 : 2010), B2 (DIN 4102-1 : 1998)
Suitable for underfloor heating:	yes
Contents:	Viscoelastic Polymers based on Polyolefines and EVA

decibeX 200VCL is rolled out under parquet or laminated flooring.

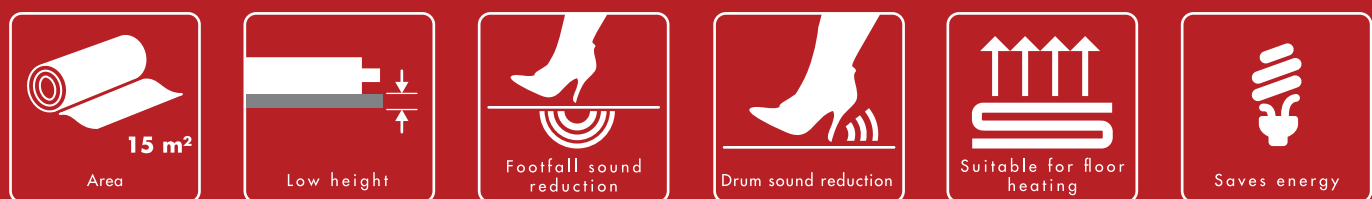

* Footfall sound is the sound that is transported to the nearby room where the floor is subjected to any kind of shock.

** Drum sound is the sound of steps made in the room we are in, and can be experienced as annoying.